

NYS SEPTIC SYSTEM REPLACEMENT FUND

This program targets cesspools and failing or likely to fail septic systems, which can include systems that directly discharge into the following priority waterbodies :

- § EAST BR FISH CREEK, UPPER, MINOR TRIBS (0703-0067)
- § FLORENCE CREEK, UPPER, AND TRIBS (0703-0070)
- § BRANTINGHAM LAKE (0801-0176)
- § BEAVER RIVER, LOWER, AND TRIBS (0801-0197)
- § CRYSTAL CREEK AND MINOR TRIBS (0801-0240)
- § DEER RIVER, MIDDLE, AND TRIBS (0801-0263)
- § SANDY CREEK, UPPER, AND TRIBS (0801-0283)
- § CHASE LAKE (0801-0321)
- § ATWATER CREEK, UPPER, AND TRIBS (0801-0330)
- § TANNERY CREEK, UPPER, AND TRIBS (0801-0338)
- § TRIBS TO BRANTINGHAM LAKE (0801-0340)
- § MILL CREEK TRIB (0801-0343)
- § UPPER BEAUTY, UPPER DEER CREEKS (0801-0347)
- § COLD BROOK TRIBS, UPPER, AND TRIBS (0801-0405)
- § SUGAR RIVER TRIB, UPPER (0801-0413)
- § INDIAN RIVER, MIDDLE, AND MINOR TRIBS (0906-0032)
- § INDIAN RIVER, UPPER, AND TRIBS (0906-0033)
- § MOHAWK RIVER, UPPER, AND TRIBS (1201-0217)
- § EAST BRANCH MOHAWK RIVER AND TRIBS (1201-0222)

CONTACT US!

Email: megankrokowski@lewiscounty.ny.gov


Phone: 315-376-5423



WEBSITE



<https://lewiscountyny.gov/departments/planning-and-community-development/septicfund/> for more information



SCAN ME

NYS SEPTIC SYSTEM REPLACEMENT FUND

Conditions Warranting Repair, Upgrade or Replacement:

1). INDICATORS OF AN OVERLOADED AND/OR CLOGGED ABSORPTION AREA, INCLUDING SEEPAGE PIT, LEACH FIELD, OR CESSPOOL.

2). THERE IS BACKUP OF SEWAGE INTO THE FACILITY SERVED BY THE SYSTEM OR ANY COMPONENT OF THE SYSTEM BECAUSE OF AN OVERLOADED AND/OR CLOGGED LEACH FIELD, SEEPAGE PIT, OR CESSPOOL.

- THERE IS A DISCHARGE OF EFFLUENT DIRECTLY OR INDIRECTLY TO THE SURFACE OF THE GROUND (THROUGH PONDING OR SURFACE BREAKOUT) OR TO SURFACE WATER.
- THE SYSTEM CONTAINS A CESSPOOL WITHOUT A SEPARATE TANK COMPONENT FOR PRIMARY SOLIDS SEPARATION AND STORAGE, (I.E., NO SEPTIC TANK).
- THE SEPTIC TANK REQUIRES PUMPING FOUR TIMES A YEAR.

3). COMPONENT DEFICIENCIES

- THE SEPTIC TANK IS MADE OF METAL AND DOES NOT COMPLY WITH THE UL-70 STANDARD; OR IS MADE OF METAL, MASONRY BLOCK, OR OTHER MATERIAL AND SHOWS SIGNS OF DETERIORATION; OR IS CRACKED OR OTHERWISE STRUCTURALLY UNSOUND, INDICATING THAT SIGNIFICANT INFILTRATION OR EXFILTRATION IS OCCURRING OR IS IMMINENT.
- DISTRIBUTION BOX IS NOT LEVEL. OR SERVICES LINE(S) ARE CRACKED/OPENED.
- PRETREATMENT UNIT IS NOT FUNCTIONING PROPERLY.
- OTHER SYSTEM COMPONENTS ARE DETERIORATED, NOT PROPERLY INSTALLED, OR OTHERWISE NOT FUNCTIONING CORRECTLY.

4). LOCATION DEFICIENCIES

- ANY PORTION OF THE ABSORPTION AREA EXTENDS TO WITHIN TWO FEET OF THE SEASONAL HIGH GROUNDWATER LEVEL.
- ANY PORTION OF THE ABSORPTION AREA IS LOCATED WITHIN 100 FEET OF AN INDIVIDUAL WELL, OR 200 FEET OF A PUBLIC WATER SUPPLY, OR 200 FEET FROM AN INDIVIDUAL WELL THAT IS LOCATED DOWNHILL AND IN DIRECT LINE OF DRAINAGE FROM THE ABSORPTION FACILITY.
- ANY PORTION OF THE ABSORPTION FIELD IS LOCATED WITHIN 100 FEET OF A WATERBODY AND THE REPLACEMENT SYSTEM CAN BE RELOCATED COMPLETELY OUTSIDE OF THE 100-FOOT BUFFER.

5). ANY PORTION OF THE ABSORPTION FIELD IS LOCATED WITHIN 100 FEET OF A WATERBODY AND THE REPLACEMENT SYSTEM EMPLOYS ENHANCED TREATMENT TECHNOLOGY.

CONTACT US!

Email: megankrokowski@lewiscounty.ny.gov


Phone: 315-376-5423



WEBSITE



<https://lewiscountyny.gov/departments/planning-and-community-development/septicfund/> for more information

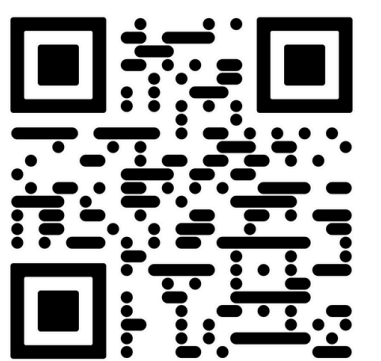

SCAN ME